

PROPOSED INSTALLATION OF STEEL DUNNAGE AND RELOCATION OF EXISTING CONDENSER UNIT AT ROOF

217A WYCKOFF STREET , BROOKLYN NY, 11217

GENERAL NOTES:

1. FLAME SPREAD & SMOKE DEVELOPED RATINGS:

1.a. ALL FINISHED TO BE AS NOTED & SHALL NOT HAVE SMOKE DEVELOPED RATINGS GREATER THAN 450.

1.b. INTERIOR FINISHES OF WALLS & CEILINGS IN ALL ROOMS OR ENCLOSED SPACES SHALL HAVE A CLASS C FLAME SPREAD INDEX 76-200; SMOKE DEVELOPED INDEX 0-450. INTERIOR FINISHES OF EXIT PASSAGEWAYS SHALL HAVE A CLASS B FLAME SPREAD INDEX 26-75; SMOKE DEVELOPED INDEX 0-450. ASTM 84. IFC TABLE 803.3

1.c. MATERIALS USED AS INTERIOR TRIM SHALL HAVE A MINIMUM CLASS C FLAME SPREAD & SMOKE DEVELOPED INDEX & SHALL COMPLY WITH ASTM 84. COMBUSTIBLE TRIM SHALL NOT EXCEED 10% OF THE AGGREGATE WALL OR CEILING AREA IN WHICH IT IS LOCATED (IFC 804.)

1.d. INTERIOR WALL & CEILING FINISHES SHALL COMPLY WITH NFPA 286 TESTING MEASURES. INTERIOR FLOOR FINISHES SHALL COMPLY WITH NFPA 253 WITH A CLASS 2 CRITICAL RADIANT FLUX>0.22 WATTS / CM2. FLOOR FINISHES IN EXIT / ACCESS CORRIDORS SHALL BE CLASS 1 CRITICAL RADIANT FLUX > 0.45 WATTS / CM2.

1.e. INTERIOR FINISH MATERIALS SHALL BE APPLIED SO THAT THEY WILL NOT BECOME READILY DETACHED WERE SUBJECTED TO 200 DEGREES F. FOR NOT LESS THAN 30 MINUTES (IFC 803.2)

1.f. THE REQUIRED FLAME SPREAD OR SMOKE DEVELOPED INDEX OF SURFACES IN EXISTING BUILDINGS MAY BE ACHIEVED BY APPLICATION OF APPROVED FIRE RETARDANT COATINGS & SHALL COMPLY WITH NFPA 703(IFC 803.4)
2. ALL ELECTRICAL WORK SHALL CONFORM TO LOCAL CODES, THE REQUIREMENTS OF THE NATIONAL ELECTRICAL CODE, & NFPA 72.
3. THE CONTRACT WORK SHALL INCLUDE FURNISHING ALL MATERIALS, EQUIPMENT, TOOLS, LABOR & SERVICES NECESSARY FOR COMPLETION OF THE PROJECT.
4. THE G.C. SHALL PERFORM ALL WORK IN CONFORMITY WITH THOSE LAWS HAVING JURISDICTION WHETHER OR NOT SUCH WORK IS NECESSARY BUILDING PERMITS & SHALL BE REIMBURSED FOR GENERAL BUILDING PERMIT COSTS BY OWNER. BUSINESS LICENSE COSTS ARE NOT REIMBURSABLE.
5. THE G.C. SHALL BE RESPONSIBLE FOR THE QUALITY OF WORKMANSHIP & FOR COMPLIANCE WITH THE DESIGN. THE G.C. SHALL CORRECT ALL ERRORS & DEVIATIONS AS REQUESTED BY THE OWNER.
6. G.C. SHALL BE RESPONSIBLE FOR QUALITY OF ALL REFURBISHED MATERIALS. ALL REFURBISHED MATERIAL TO APPEAR NEW.
7. THE G.C. SHALL PROVIDE & INSTALL FIRE EXTINGUISHERS PER CFC STANDARD 10-1
8. ALL WOOD BLOCKING, STUDS, PLYWOOD, ETC. TO BE FIRE RETARDANT.
9. AT THE TIME OF SUBMITTING FINAL BID, THE G.C. SHALL VERIFY ALL RELEVANT DIMENSIONS, ELEVATIONS, ANGLES, & EXISTING CONDITIONS BEFORE PROCEEDING WITH THE AFFECTED WORK & NOTIFY THE ARCHITECT OF ANY DISCREPANCIES IMMEDIATELY. ALL DISCREPANCIES SHALL BE RESOLVED PRIOR TO PROCEEDING WITH AFFECTED WORK.
10. THE G.C. SHALL CONTACT THE OWNER / TENANT IMMEDIATELY IF THEY ENCOUNTER ANY HAZARDOUS MATERIALS.
11. EXACT LOCATIONS OF PIPING, DUCTWORK, CONDUIT & FIXTURES SHALL BE COORDINATED BETWEEN CONTRACTORS & SUBCONTRACTORS TO AVOID INTERFERENCE.
12. ALL SPRINKLER HEADS SHOWN ARE CONCEPTUAL ONLY G.C. TO HIRE A LICENSED SPRINKLER CONTRACTOR TO DESIGN & INSTALL / MODIFY SPRINKLER SYSTEM. HEAD REPLACEMENT TO MEET ALL LOCAL & NATIONAL CODES INCLUDING NFPA-13.
13. EACH CONTRACTOR SHALL COORDINATE ARCHITECTURAL DRAWINGS WITH THE PLUMBING, MECHANICAL, & ELECTRICAL DRAWINGS & ALL SPECIFICATIONS BEFORE PROCEEDING WITH THE WORK & SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES OR CONFLICTS IMMEDIATELY. ALL DISCREPANCIES SHALL BE RESOLVED PRIOR TO THE CONTRACTOR PROCEEDING WITH AFFECTED WORK.
14. SHOULD ANY OF THE DETAILED INSTRUCTIONS ON THE DRAWINGS CONFLICT WITH THE NOTES OR SPECIFICATIONS OR WITH EACH OTHER, THE STRICTEST PROVISION SHALL APPLY.
15. ADDITIONAL WORK, IF APPLICABLE, MUST BE AUTHORIZED IN WRITING BY BOTH THE CLIENT, MANAGER & ARCHITECT AFTER THE FORMAL REQUEST FOR INFORMATION (RFI) PROCESS HAS BEEN COMPLETED (GC ISSUES AN RFI TO THE ARCHITECT, IF THE CLARIFICATIONS & / OR SUPPLEMENT INFORMATION INVOLVE AN ADJUSTMENT IN THE CONTRACT SUM, THE ARCHITECT SHALL ISSUE A WORK CHANGE PROPOSAL REQUEST TO THE G.C. TO OBTAIN PRICE QUOTATIONS NEEDED FOR NEGOTIATING CHANGES IN THE CONTRACT FOR CONSTRUCTION.
16. JOB SITE CLEANING: DURING DEMOLITION & CONSTRUCTION, THE JOB SITE & BUILDING INTERIOR SHALL BE CLEANED ON A DAILY BASIS, INCLUDING REMOVAL OF TRASH, RUBBLE, DEBRIS & ORGANIZATION OF MATERIALS & EQUIPMENT. UPON COMPLETION OF THE WORK, THE JOB SITE & BUILDING INTERIOR SHALL BE THOROUGHLY CLEANED, INCLUDING ALL AREAS OF THE BUILDING MADE DIRTY BY CONSTRUCTION WORK. THE G.C. SHALL REMOVE TRASH, RUBBLE, TOOLS, EQUIPMENT & EXCESS MATERIALS FROM THE PREMISES. THE BUILDING IS TO BE LEFT IN PERFECTLY CLEAN CONDITION.
17. G.C. IS TO PROVIDE SUPERVISION OF ALL TRADES / SUBS (INCLUDING THOSE HIRED BY THE OWNER AS WELL AS ON-SITE SUPERVISION UNTIL THE STORE'S GRAND OPENING, G.C. & E.C. TO BE ON SITE GRAND OPENING DAY IN CASE OF EMERGENCY.
18. STAGING AREA WILL BE CONTAINED TO AN AREA AS DICTATED BY THE OWNER P.M.
19. G.C. REQUIRED TO HAVE (10) TEN 30-YARD DUMPSTERS AVAILABLE DURING CONSTRUCTION & THROUGH THE FIXTURE INSTALL PROCESS, AT A LOCATION APPROVED BY THE LANDLORD, MALL OR OWNER.
20. OWNER SHALL CONTRACT WITH A 3RD PARTY COMMISSIONING AGENT (CxA) TO PERFORM FUNDAMENTAL COMMISSIONING ON ALL NEW STORE. THE PURPOSE OF 3RD PARTY COMMISSIONING IS TO ENSURE THAT THE OWNER ARE DELIVERED A FACILITY BY THE LANDLORD THAT REPRESENT THE DRAWINGS, SPECIFICATION, AND TERMS OF THE LEASE AGREEMENT; THAT ALL HVAC & LIGHTING EQUIPMENT IS FULLY OPERATIONAL & TIED TO THE OWNER ENERGY MANAGEMENT SYSTEM (EMS) TO OPTIMIZE CONTROL & ENERGY EFFICIENCY. SEE RESPONSIBILITY SCHEDULE & MEP DRAWINGS FOR ADDITIONAL INFORMATION.

PROFESSIONAL STATEMENT

"TO THE BEST OF MY KNOWLEDGE, BELIEF AND PROFESSIONAL JUDGEMENT, ALL WORK UNDER THIS APPLICATION IS IN COMPLIANCE WITH CHAPTER C4 OF THE 2020 NYCECC."

SPECIAL/ PROGRESS INSPECTIONS:

- MECHANICAL SYSTEM.....BC 1704.16

PROGRESS INSPECTIONS:

- ENERGY CODE COMPLIANCE INSPECTIONS.....BC 110.3.5

- HVAC AND SERVICE WATER HEATING EQUIPMENT.....(IB3), (IIB3)
- HVAC AND SERVICE WATER HEATING SYSTEM CONTROLS.....(IB4), (IIB4)
-HVAC INSULATION AND SEALING(IB5), (IIB5)


- FINAL DIRECTIVE 14 OF 1975, 28-116.2.4.2, BC 110.5, AND 1 RCNY 101-10

DRAWING LIST:

- A-001 - PLOT PLAN
- A-002 - GENERAL NOTES, PHOTOS
- A-003 - GENERAL NOTES , VIEWS
- A-004 - EXISTING ROOF
- A-005 - PROPOSED ROOF

SCOPE OF WORK:
PROPOSED INSTALLATION OF NEW STEEL DUNNAGE AND RELOCATION OF EXISTING CONDENSER UNIT.NO CHANGE TO USE EGRESS OR OCCUPANCY

ZONING ANALYSIS -- R6B
ADDRESS: 217A WYCKOFF STREET BROOKLYN, NY 11217
BLOCK: 387
LOT: 67
ZONE: R6B
LANDMARK DISTRICT : BOERUM HILL HISTORIC DISTRICT EXTENSION
MAP: 16C
USE GROUP: RESIDENTIAL
PROPOSAL: PROPOSED STEEL DUNNAGE AT ROOF AND RELOCATION OF EXISTING CONDENSER UNIT
OCC. CLASS: RES (EXISTING) , R-3 (PROPOSED)
CONST. CLASS: TYPE III, NON-FIREPROOF (PRIOR TO 1968)
LOT AREA: 1,667 SF

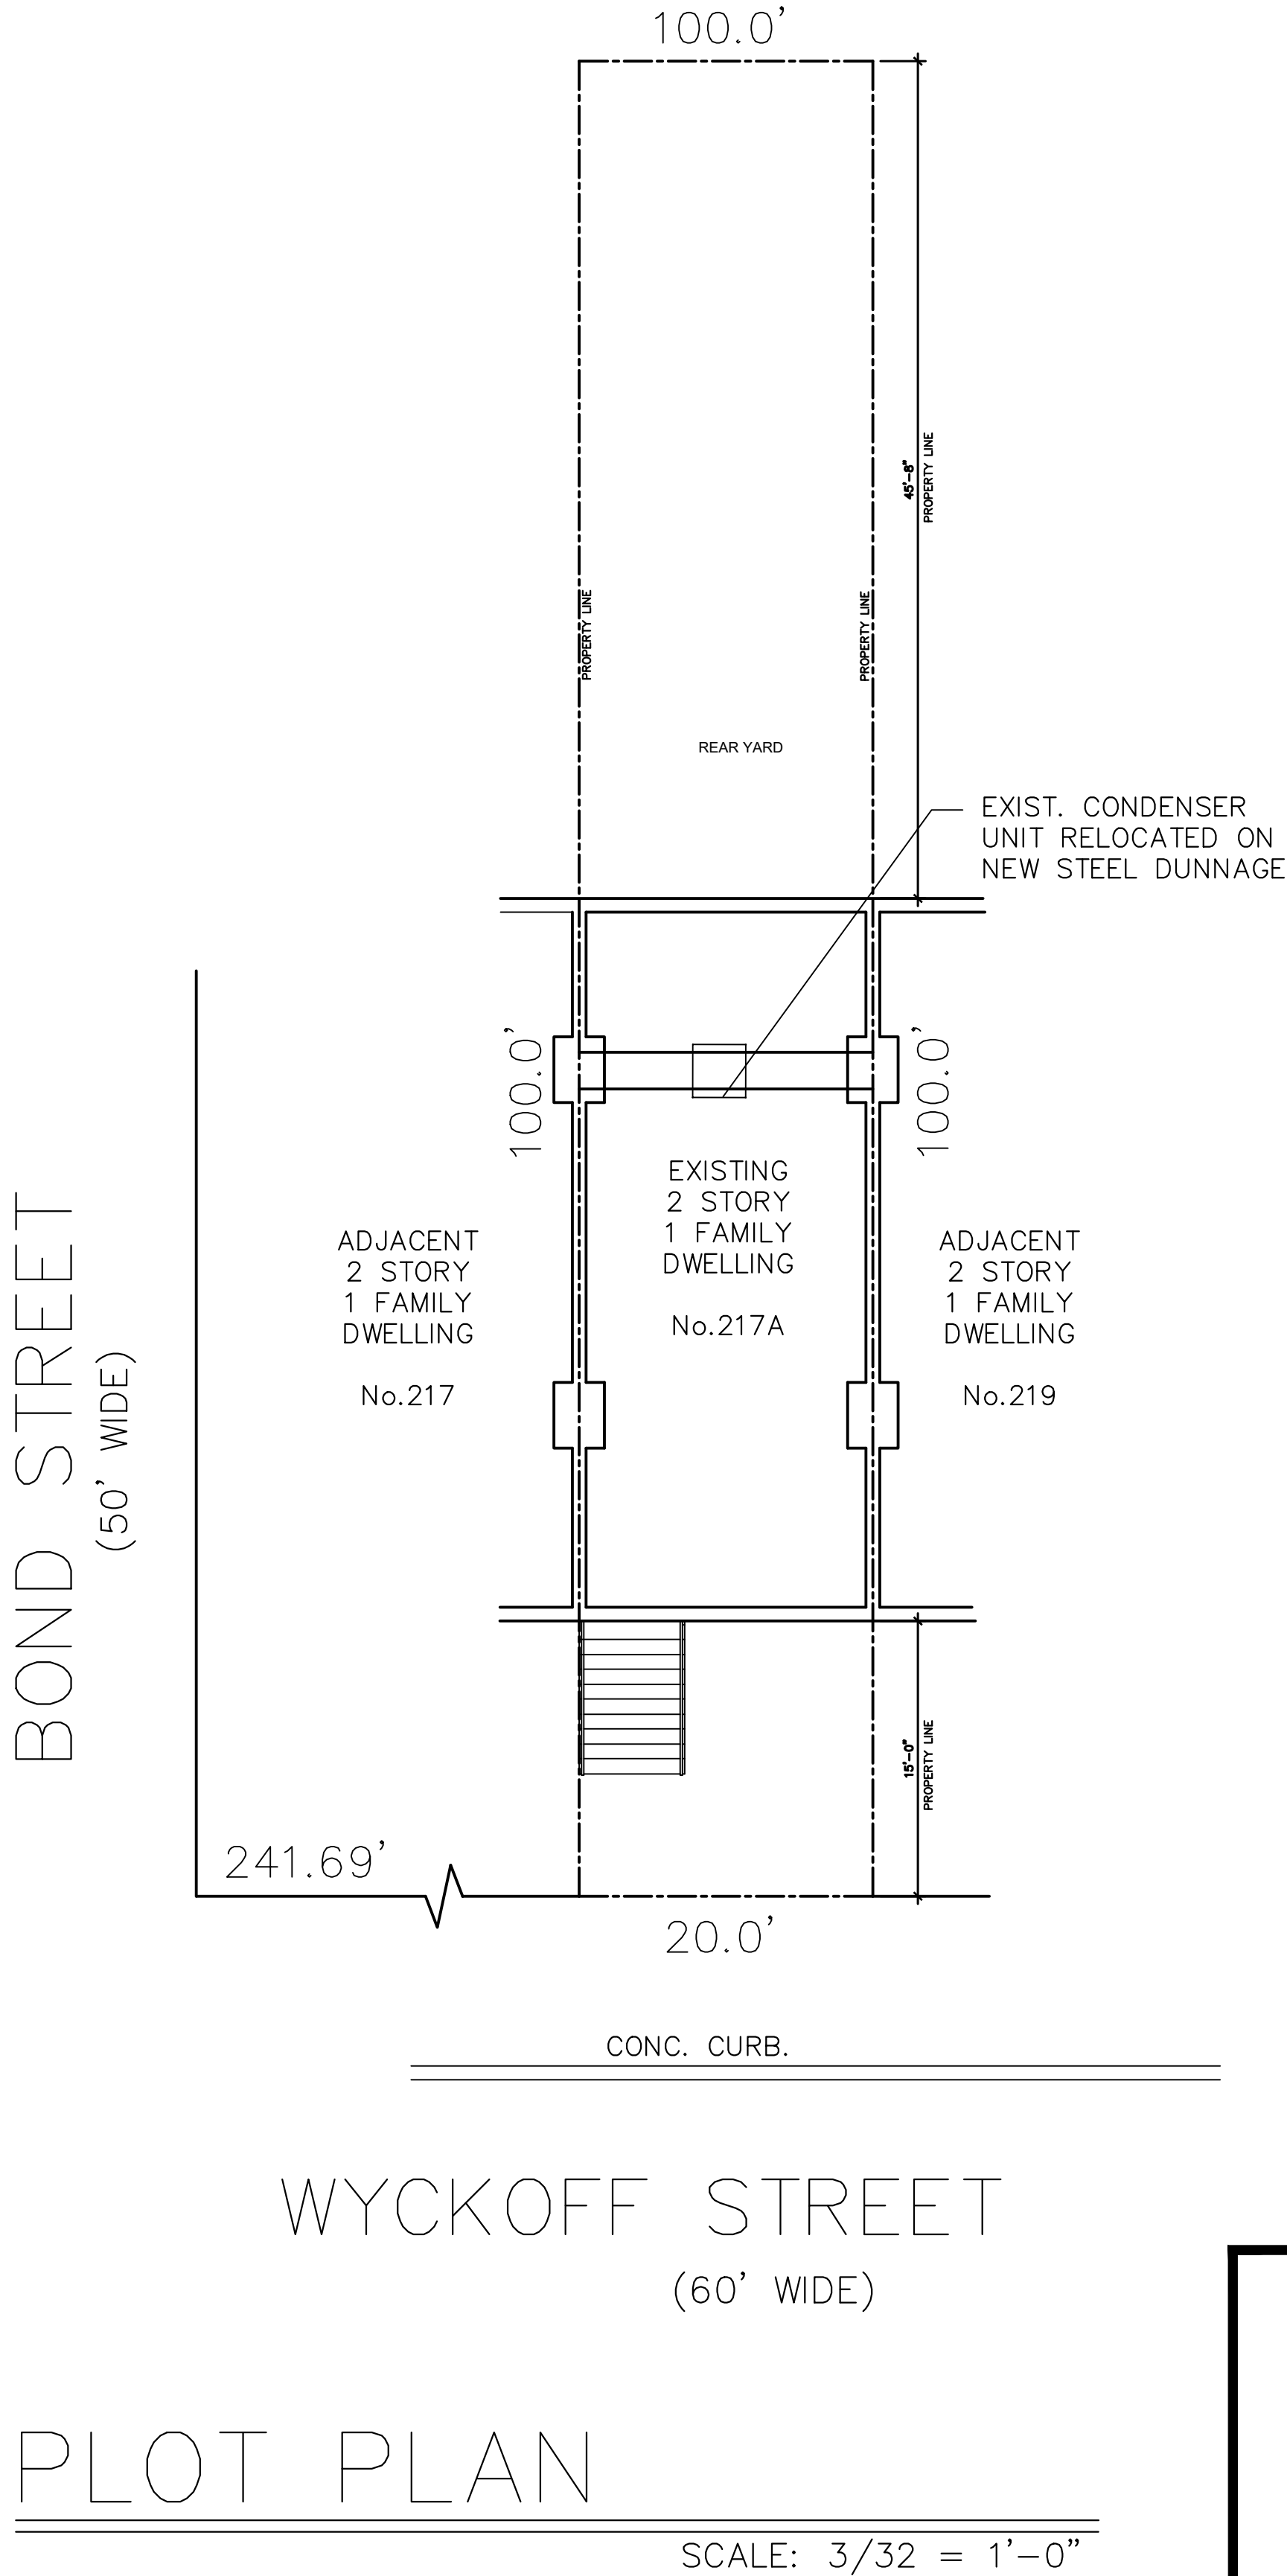

KC
EXPEDITING
2466 HARDING COURT
EAST MEADOW, NY 11554

ARCHITECT :
JEFFREY BELL, RA
786 LINDEN ROAD
TOMS RIVER, NJ 08753

REVISIONS:

OWNER:

PROJECT TITLE & ADDRESS:
INSTALLATION OF STEEL DUNNAGE & RELOCATION OF EXISTING CONDENSER :
217A WYCKOFF ST
BROOKLYN, NY 11217
BLOCK: 387 LOT: 67

SHEET TITLE:

PLOT PLAN

A-001.00

SEAL & SIGNATURE	JOB#:
	DRN BY: GU
	CKD BY :
	DATE: 03/12/26
	SCALE: NTS
SHEET 1 OF 5	

GENERAL NOTES AND SPECIFICATIONS:

CONTRACTORS SHALL VERIFY ALL JOB AND FIELD CONDITIONS AFFECTING ALL WORK, AND OBTAIN ALL DIMENSIONS TO INSURE THE PROPER STRENGTH, FIT AND LOCATION OF WORK.. REPORT IN WRITING, TO THE ARCHITECT AND ENGINEER ANY AND ALL CONDITIONS WHICH MAY INTERFERE WITH OR OTHERWISE AFFECT OR PREVENT, THE PROPER EXECUTION AND COMPLETION OF THE WORK.

ALL CONSTRUCTION SHALL COMPLY FULLY WITH THE APPLICABLE PROVISIONS OF THE NEW YORK CITY BUILDING CODE.

ALL REQUIREMENTS SPECIFIED IN THE CODE SHALL BE ADHERED TO AS IF THEY WERE CALLED FOR, OR SHOWN, ON THE DRAWINGS. THIS SHALL NOT BE CONSTRUED TO MEAN THAT ANY REQUIREMENTS SET ON THE DRAWINGS MAY BE MODIFIED BECAUSE THEY ARE MORE STRINGENT THAN THE CODE FORTH REQUIREMENTS OR BECAUSE THEY ARE NOT SPECIFICALLY REQUIRED BY CODE.

DO NOT SCALE THE DRAWINGS, ANY DISCREPANCIES SHALL BE REPORTED, IN WRITING, TO THE FOR CLARIFICATION. ARCHITECT

GENERAL CONTRACTOR SHALL COORDINATE FOR EASE AND RAPIDITY OF CONSTRUCTION THE WORK OF ALL TRADES. ALL SLOTS, SLEEVES AND/OR OTHER OPENINGS TO BE COORDINATED AND SET BEFORE POURING CONCRETE.

CONTRACTOR SHALL PROVIDE ALL THE NECESSARY SUPPORT, BRACING, SHORING, ETC., (TEMPORARY AND/OR PERMANENT) AS REQUIRED FOR THE SAFE INSTALLATION OF NEW CONSTRUCTION.

ALL BATHROOMS AND POWDER ROOMS WITHOUT NATURAL VENTILATION TO BE EQUIPPED WITH A SWITCH CONTROLLED EXHAUST FAN TO PROVIDE A MINIMUM OF 60CFM OF EXHAUST.

UNLESS SPECIFICALLY STATED OTHERWISE, ALL APPLICABLE PORTIONS OF THE GENERAL CONDITIONS (AIA #A201, 1987 EDITION) SHALL APPLY TO ALL PORTIONS OF THIS CONTRACT.

THE CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, FIXTURES, EQUIPMENT, AND SERVICES NECESSARY AND REQUIRED TO COMPLETE ALL WORK AS INDICATED ON THE DRAWINGS AND/OR SPECIFIED HEREIN.

THE CONTRACTOR SHALL ORDER ALL SPECIFIED MATERIAL AND FABRICATED ITEMS WITH SUFFICIENT LEAD TIMES SO AS TO DELAY WORK IN ANY MANNER.

SUBMISSION OF PROPOSAL BY CONTRACTORS WILL BE CONSTRUED AS EVIDENCE THAT A CAREFUL AND THOROUGH EXAMINATION OF PREMISES HAS BEEN MADE AND LATER CLAIMS FOR LABOR, MATERIALS OR EQUIPMENT REQUIRED OR FOR DIFFICULTIES ENCOUNTERED WHICH COULD HAVE BEEN FORESEEN HAD SUCH AN EXAMINATION BEEN MADE WILL NOT BE RECOGNIZED. IT SHALL ALSO CONSTITUTE A REPRESENTATION THAT THE CONTRACTOR HAS CHECKED AND VERIFIED ALL QUANTITIES, WORK AND MATERIALS INVOLVED AND THAT HE SHALL TAKE RESPONSIBILITY FOR ANY DEFICIENCIES THEREIN.

CONTRACTOR SHALL BARE RESPONSIBILITY FOR THE REPAIR OF ANY WORK ALREADY IN PLACE THAT IS DAMAGED BY HIM WHILE COMPLETING HIS CONTRACT.

MANUFACTURER'S RECOMMENDATIONS AND INSTALLATION INSTRUCTIONS SHALL BE ADHERED TO FOR ALL MATERIALS AND PROCESSED USED.

THE CONTRACTOR SHALL CARRY AND SUBMIT EVIDENCE OF INSURANCE AS REQUIRED.

ALL DIMENSIONS GIVEN ARE TO FACE OF STUD UNLESS OTHERWISE NOTED. CONTRACTOR SHALL SUBMIT SHOP DRAWINGS AND MANUFACTURER'S CUTS AND SAMPLES TO ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO COMMENCEMENT OF SUCH WORK.

UPON COMPLETION OF WORK CONTRACTOR SHALL COMPLETELY CLEAN THE CONSTRUCTION AREA, SUITABLE FOR OWNER'S USE, AS DETERMINED BY THE ARCHITECT. SUCH CLEANING SHALL INCLUDE REMOVAL OF ALL LABELS (AFTER ARCHITECT'S INSPECTION), CLEANING OF ALL EQUIPMENT, CONSTRUCTION WORK, AND OTHER WORK.

GUARANTEE: THE CONTRACTOR SHALL GUARANTEE ALL THE WORK UNDER THIS CONTRACT FOR ONE (1) YEAR FROM THE DATE OF FINAL ACCEPTANCE. HE SHALL BE RESPONSIBLE FOR AND MAKE GOOD, WITHOUT EXPENSE TO THE OWNER, ANY AND ALL DEFECTS ARISING DURING THIS PERIOD THAT ARE DUE TO IMPERFECT MATERIAL AND APPLIANCES AND/OR POOR WORKMANSHIP.

MINOR ITEMS OF WORK SUCH AS PATCHING, BLOCKING, ETC. SHALL BE PERFORMED AS REQUIRED TO MAKE THE WORK COMPLETE WHETHER SHOWN OR NOTED ON THE CONTRACT DOCUMENTS OR NOT.

BEFORE ORDERING ANY MATERIAL OR DOING ANY WORK EACH TRADE SHALL VERIFY ALL MEASUREMENTS AT THE BUILDING AND SHALL BE RESPONSIBLE FOR THE CORRECTNESS OF SAME. NO EXTRA OR COMPENSATION WILL BE ALLOWED ON ACCOUNT OF DIFFERENCE BETWEEN ACTUAL DIMENSIONS AND THE MEASUREMENTS INDICATED ON THE DRAWINGS. ANY DISCREPANCIES BETWEEN THE DRAWINGS AND FIELD CONDITIONS WHICH MAY BE FOUND SHALL BE SUBMITTED TO THE ARCHITECT FOR CONSIDERATION AND CLARIFICATION BEFORE PROCEEDING WITH THE WORK.

ALL THE ARCHITECT'S DRAWINGS AND CONSTRUCTION NOTES ARE COMPLIMENTARY AND WHAT IS CALLED FOR BY EITHER WILL BE BINDING AS IF CALLED FOR BY ALL. ANY WORK SHOWN OR REFERRED TO ON ANY ONE DRAWING SHALL BE PROVIDED AS THOUGH SHOWN ON ALL DRAWINGS. WHENEVER AN ITEM IS SPECIFIED AND/OR SHOWN ON THE DRAWINGS BY DETAIL OR REFERENCE IT SHALL BE CONSIDERED TYPICAL FOR ANY OTHER ITEMS WHICH ARE OBVIOUSLY INTENDED TO BE THE SAME EVEN THOUGH NOT DO SERVE THE SAME FUNCTION.

21. THE CONTRACTOR SHALL ABIDE BY AND COMPLY WITH THE TRUE INTENT AND MEANING OF THE DRAWINGS AND NOTES TAKEN AS A WHOLE AND SHALL NOT AVAIL HIMSELF OF ANY OBVIOUS ERRORS OR OMISSIONS SHOULD ANY EXIST. SHOULD ANY ERROR OR DISCREPANCY APPEAR OR ANY DOUBT ARISE AS TO THE TRUE MEANING OF THE DRAWING OR NOTES, THE CONTRACTOR SHALL BRING SUCH ITEMS TO THE ATTENTION OF THE ARCHITECT BEFORE SUBMISSION OF PROPOSAL THE WILL BE HELD RESPONSIBLE FOR ALL SUCH ITEMS.

22. THE CHARACTER AND SCOPE OF THE WORK ARE ILLUSTRATED BY THE DRAWINGS AND NOTES. TO INTERPRET AND EXPLAIN THE DRAWINGS OTHER INFORMATION DEEMED NECESSARY BY THE ARCHITECT WILL BE FURNISHED TO THE CONTRACTOR WHEN AND AS REQUIRED BY THE WORK AND ITS IS TO BE UNDERSTOOD THAT SAID ADDITIONAL INFORMATION OR DRAWINGS ARE TO BE OF EQUAL FORCE WITH THESE DRAWINGS.

23. CONTRACTOR TO FOLLOW ARCHITECTS/ENGINEERS SPECIFICATION FOR ALL MATERIALS, FINISHES AND FINISH PROCESSES WITH NO SUBSTITUTION UNLESS APPROVED BY ARCHITECT OR ENGINEER.

24. THE STANDARD SPECIFICATIONS OF THE MANUFACTURERS APPROVED FOR USE IN THE PROJECT ARE HEREBY MADE A PART OF THESE NOTES WITH THE SAME FORCE AND EFFECT AS THOUGH HEREIN WRITTEN OUT IN FULL EXCEPT THAT WHEREVER THE DRAWINGS REQUIRE HEAVIER MEMBERS AND BETTER QUALITY MATERIALS THESE MORE STRINGENT REQUIREMENTS SHALL GOVERN.

25. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY IF HE CANNOT FOR ANY REASON COMPLY WITH ALL THE REQUIREMENTS OF THESE NOTES AND DRAWINGS.

26. ALL WORK SHALL BE SUBJECT TO FINAL INSPECTION BY THE ARCHITECT AND ACCEPTANCE BY THE OWNER.

27. THE CONTRACTOR SHALL KEEP THE ARCHITECT INFORMED OF PROGRESS OF WORK. NO WORK SHALL BE CLOSED OR COVERED UNTIL IT HAS BEEN DULY INSPECTED AND APPROVED. SHOULD UNINSPECTED WORK BE COVERED THE CONTRACTOR SHALL AT HIS OWN EXPENSE UNCOVER ALL SUCH WORK SO THAT IT CAN BE PROPERLY INSPECTED AND AFTER INSPECTION HE SHALL PROPERLY REPAIR AND REPLACE ALL WORK INTERFERED WITH.

28. SMOKE DETECTING ALARM DEVICES, SHALL BE INSTALLED IN CONFORMITY WITH SECTION 1060.10 OF THE NYS BUILDING CODE SHALL BE PROVIDED OUTSIDE EACH SEPARATE SLEEPING AREA, IN EACH SLEEPING AREA AND ON EACH FLOOR LEVEL.

29. ALL PLUMBING WORK SHALL CONFORM TO THE N.Y.C. BUILDING CODE.

30. ALL PLUMBING WORK SHALL BE PERFORMED BY A LICENSED PLUMBER.

31. ALL ELECTRICAL WORK SHALL BE PERFORMED BY A LICENSED ELECTRICIAN.

32. AN ELECTRICIAN SHALL OBTAIN AN ELECTRICAL PERMIT AND C OF O SIGN OFF.

33. TO THE BEST OF MY KNOWLEDGE, BELIEF AND PROFESSIONAL JUDGEMENT, THESE PLANS AND SPECIFICATIONS ARE IN COMPLIANCE WITH THE ENERGY CONSERVATION CONSTRUCTION CODE OF NEW YORK STATE, USING CHAPTER 5.

34. PROVIDE F.A.I. AND TEMPERED GLASS DOOR FOR FIREPLACE AS PER N.Y.S. ENERGY CONSERVATION CODE.

35. ARCHITECT HAS NOT BEEN RETAINED FOR SUPERVISION OF CONSTRUCTION.

36. A FINAL SURVEY MUST BE SUBMITTED AT COMPLETION OF JOB.

37. IT IS THE CONTRACTORS RESPONSABILITY TO PERFORM ALL WORK IN SAFE & PROFESSIONAL MANNER THAT WILL PROTECT ALL WORKERS, THE PUBLIC, ADJOINING PROPERTIES, AND OWNERS FROM DAMEGE AND INJURY.


38. ARCHITECT SHALL NOT HAVE CONTROL OVER, CHARGE OF, OR RESPONSIBILITY FOR CONSTRUCTION MEANS, METHODS TECHNIQUES, SEQUENCES OR PROCEDURES, OR SAFETY PRECAUTIONS AND PROGRAMS IN CONNECTION WITH THE WORK, SINCE THESE ARE SOLELY THE CONTRACTOR'S RESPONSIBILITY UNDER THE CONTRACT FOR CONTRUCTION. THE ARCHITECT SHALL NOT BE RESPONSBLE FOR THE CONTACTOR'S SCHEDULES OF FAILURE TO CARRY OUT THE WORK IN ACCORDANCE WITH CONTRACT DOCUMENTS. THE ARCHITECT SHALL NOT HAVE CONTROL OVER OR CHARGE OF ACTS OR OMISSIONS OF THE CONTRACTOR, SUBCONTRACTOR, OR THEIR AGENTS OR EMPLOYEES, OR ANY OTHER PERSONS PERFORMING ANY OF THE WORK.

39. OWNER ASSUMES LIABILITY FOR AND AGREES TO INDEMNIFY, AND HOLD ARCHITECT, ITS CONSULTANTS, AND THEIR RESPECTIVE OFFICERS, DIRECTORS, SHAREHOLDERS, PARTNERS, PRICIPALS, EMPLOYEES, SUCCESSORS AND ASSIGNS HARMLESS FROM AND AGAINST ALL DAMAGES, LOSSES AND JUDGEMENTS, INCLUDING REASONABLE ATTORNEY'S FEES AND EXPENSES, TO THE EXTENT THEY ARISE FROM AN ACT OR OMISSION OF OWNER, ITS AGENTS, EMPLOYEES, CONSULTANTS, CONTRACTORS OR CONSTRUCTION MANAGER.

40. AIR CONDITIONING UNIT MIN. 8'0 FROM PROPERTY LINE



CURRENT CONDITION

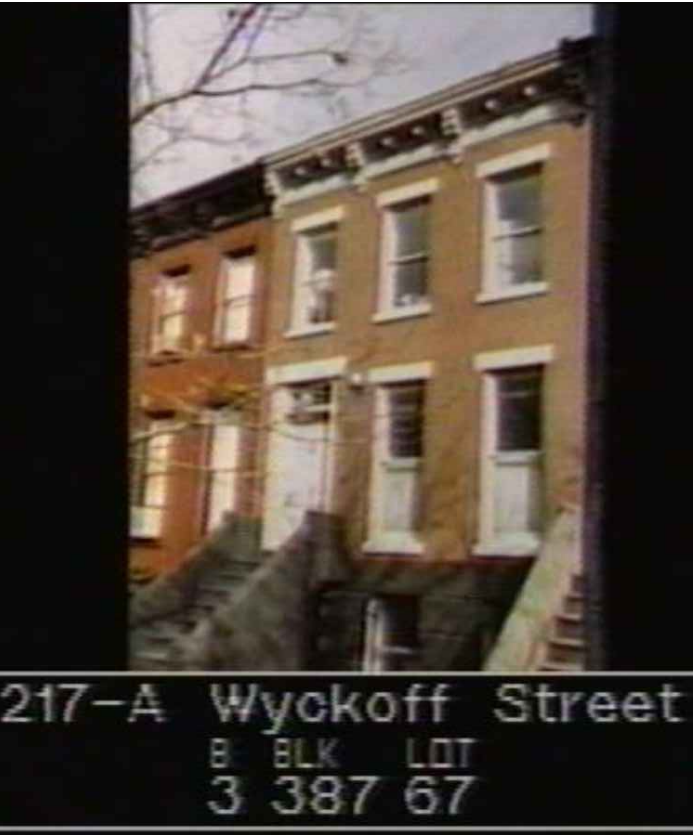

1980 TAX PHOTO



1940 TAX PHOTO

KC
EXPEDITING
2466 HARDING COURT
EAST MEADOW, NY 11554

REVISIONS:

OWNER:

PROJECT TITLE & ADDRESS:

INSTALLATION OF
STEEL DUNNAGE &
RELOCATION OF
EXISTING CONDENSER :

217A WYCKOFF ST
BROOKLYN, NY 11217
BLOCK: 387 LOT: 67

SHEET TITLE:

GENERAL NOTES

A-002.00

SEAL & SIGNATURE	JOB#:
	DRN BY: GU
	CKD BY :
	DATE: 03/12/26
	SCALE: NTS
	SHEET 2 OF 5

REVISIONS:

OWNER:

PROJECT TITLE & ADDRESS:

INSTALLATION OF
STEEL DUNNAGE &
RELOCATION OF
EXISTING CONDENSER :

217A WYCKOFF ST
BROOKLYN, NY 11217
BLOCK: 387 LOT: 67

SHEET TITLE:

EXISTING ROOF PLAN ,
PHOTOS

A-004.00

SEAL & SIGNATURE

JOB#:



DRN BY: GU

CKD BY :

DATE: 03/12/26

SCALE: NTS

SHEET 4 OF 5

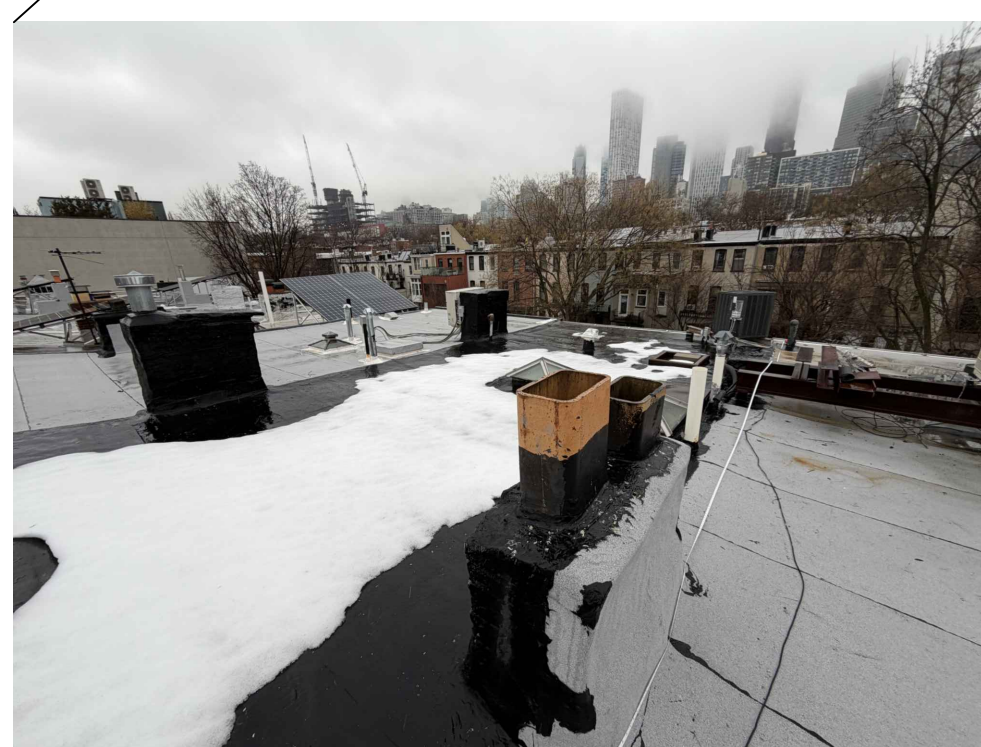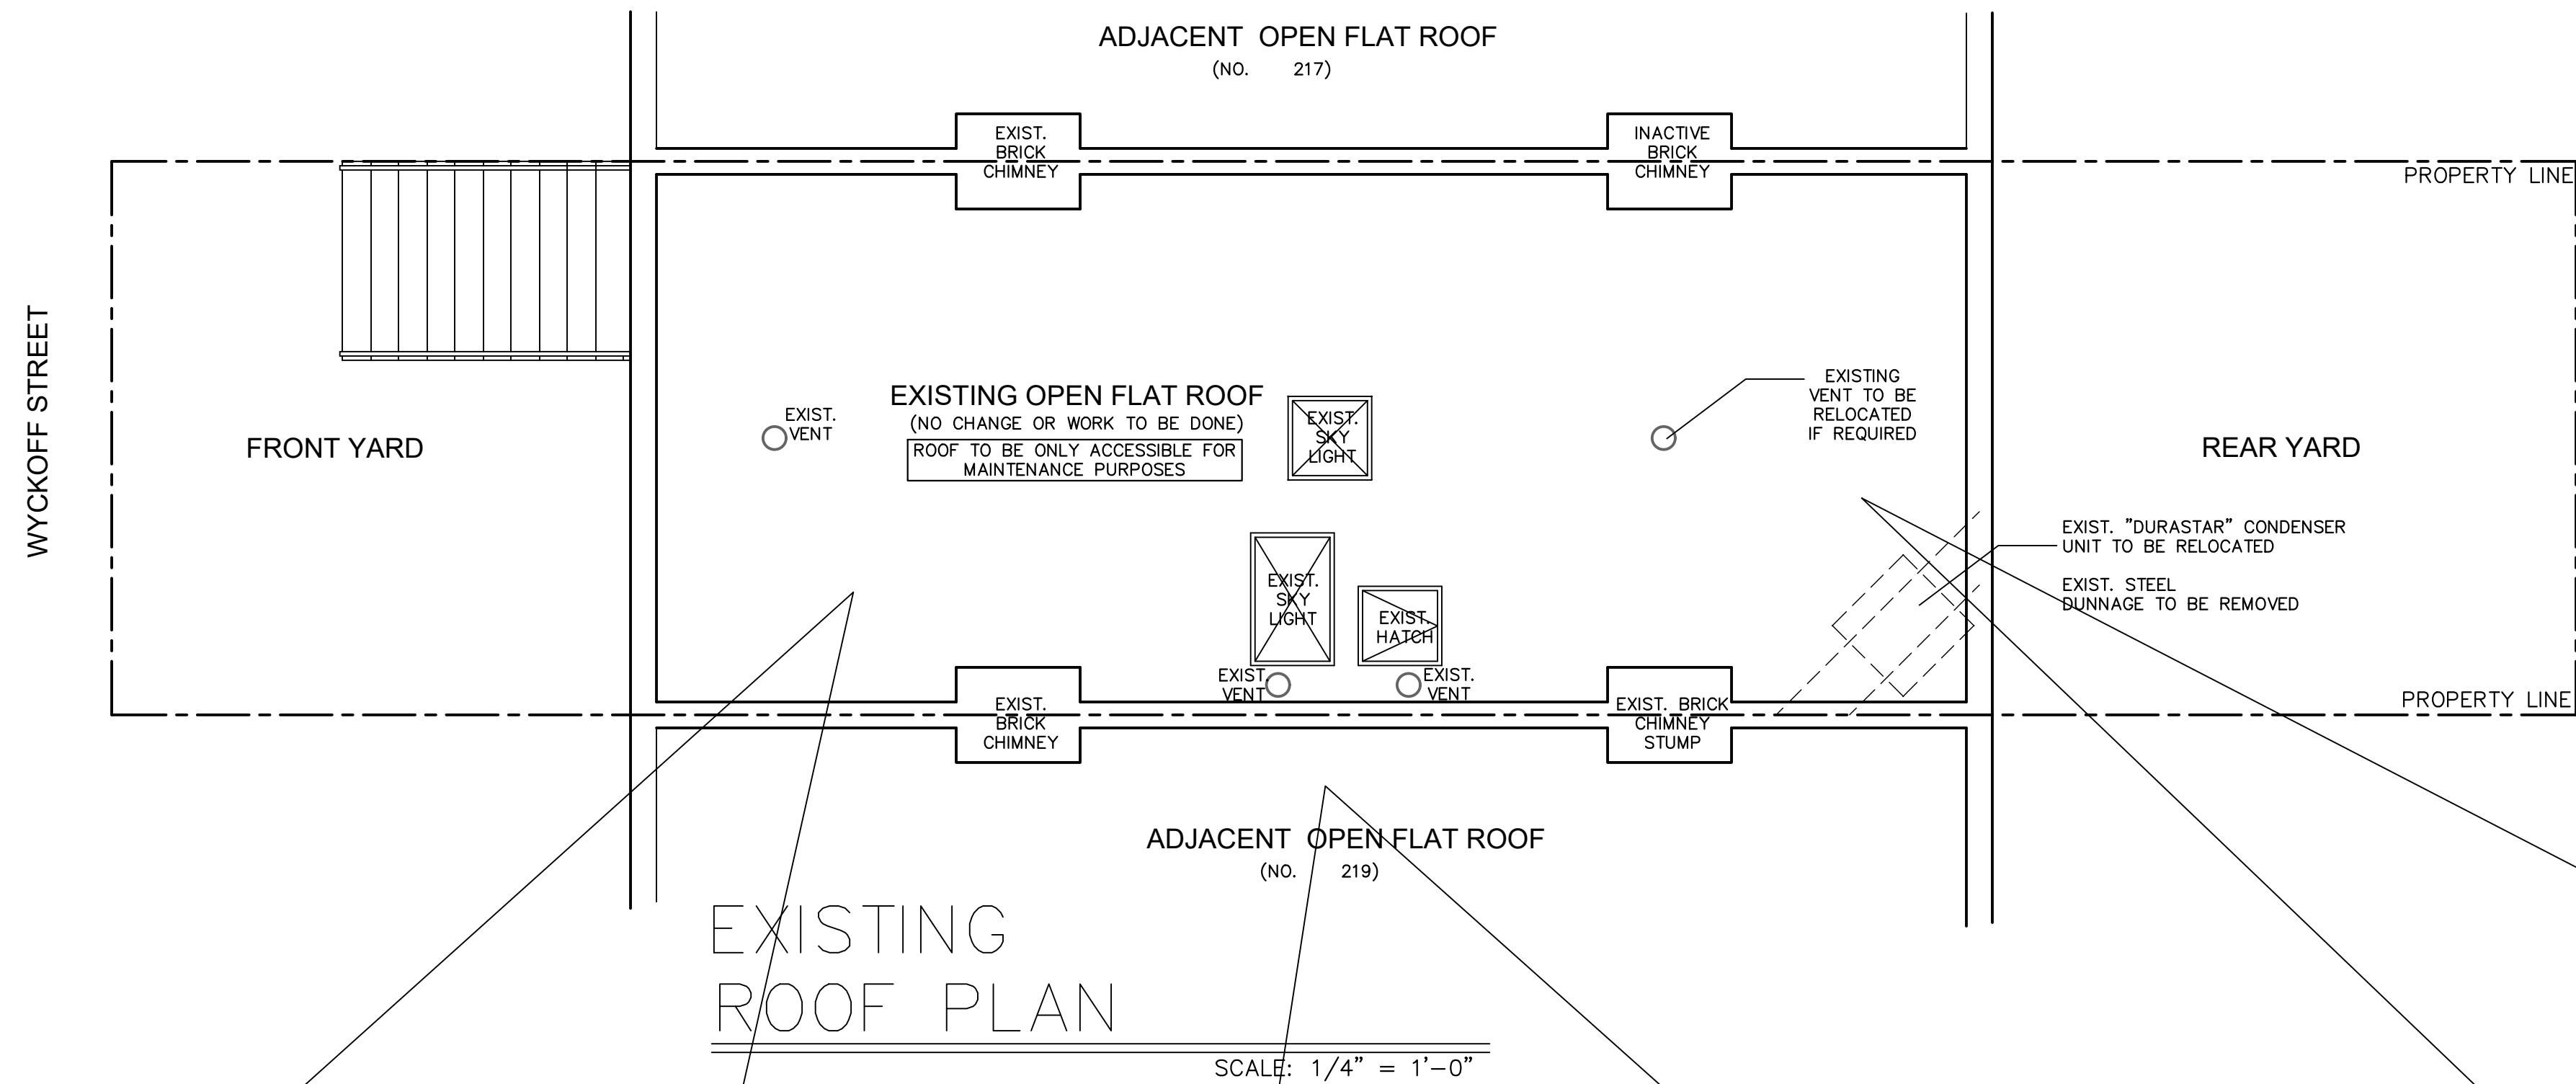


ROOF VIEW FACING REAR YD.








ROOF VIEW FACING NEIGHBORING BLDG



ROOF VIEW FACING WYCKOFF ST.

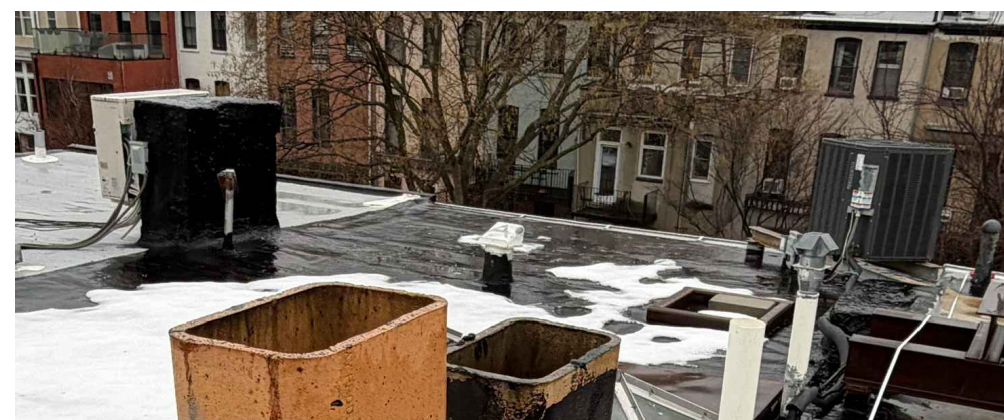

PROPOSED LOCATION OF NEW DUNNAGE

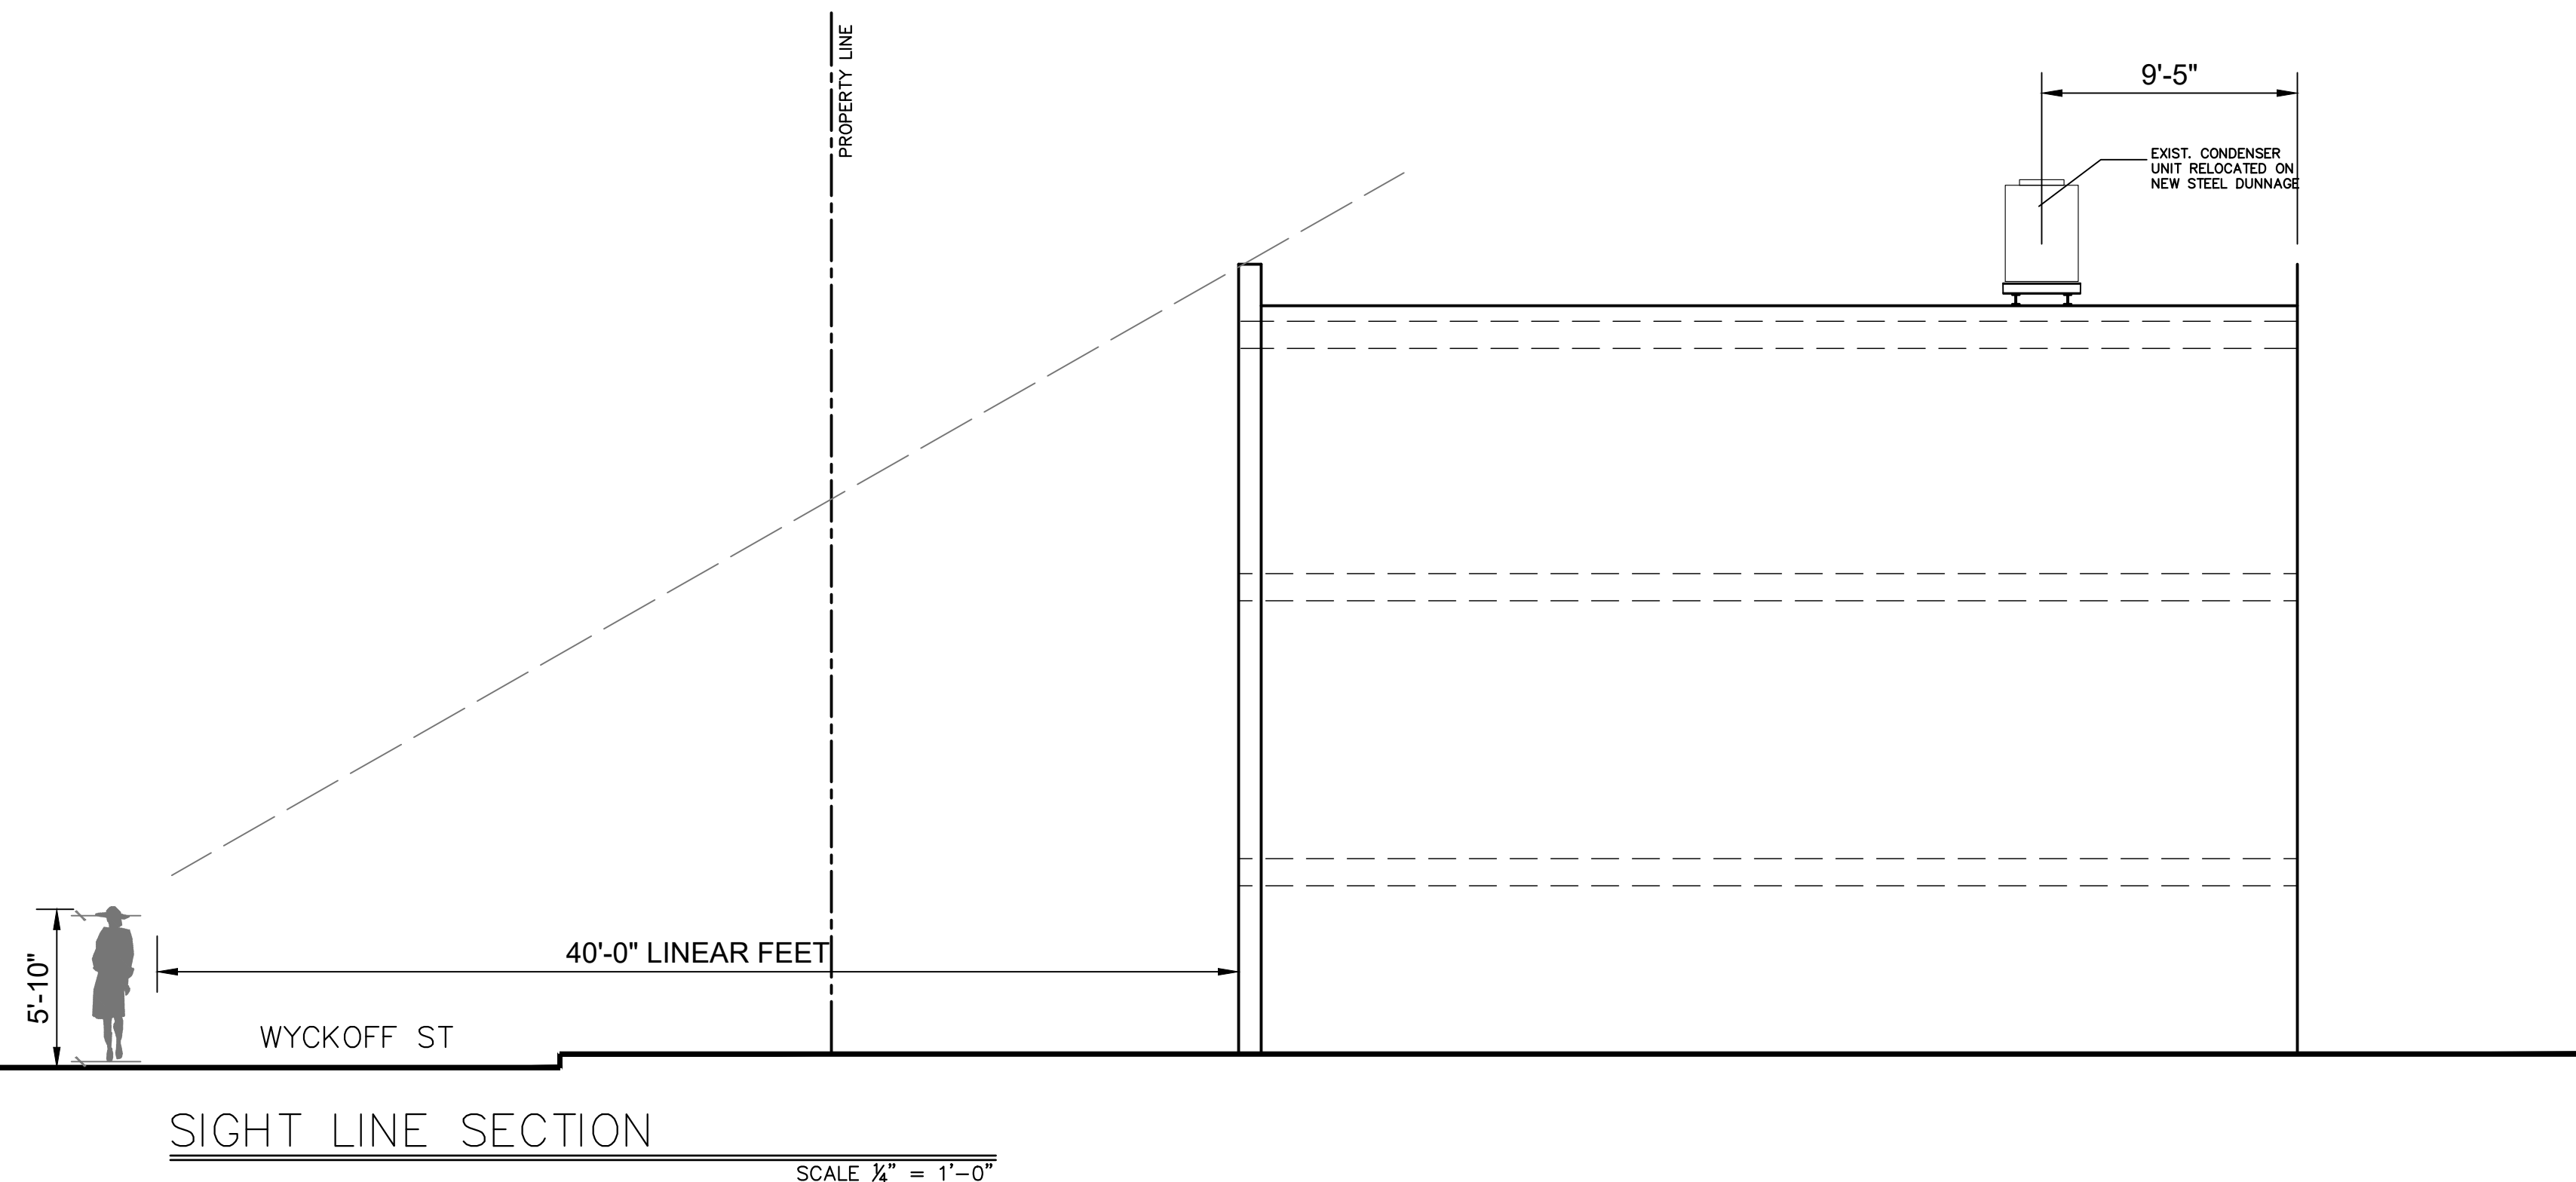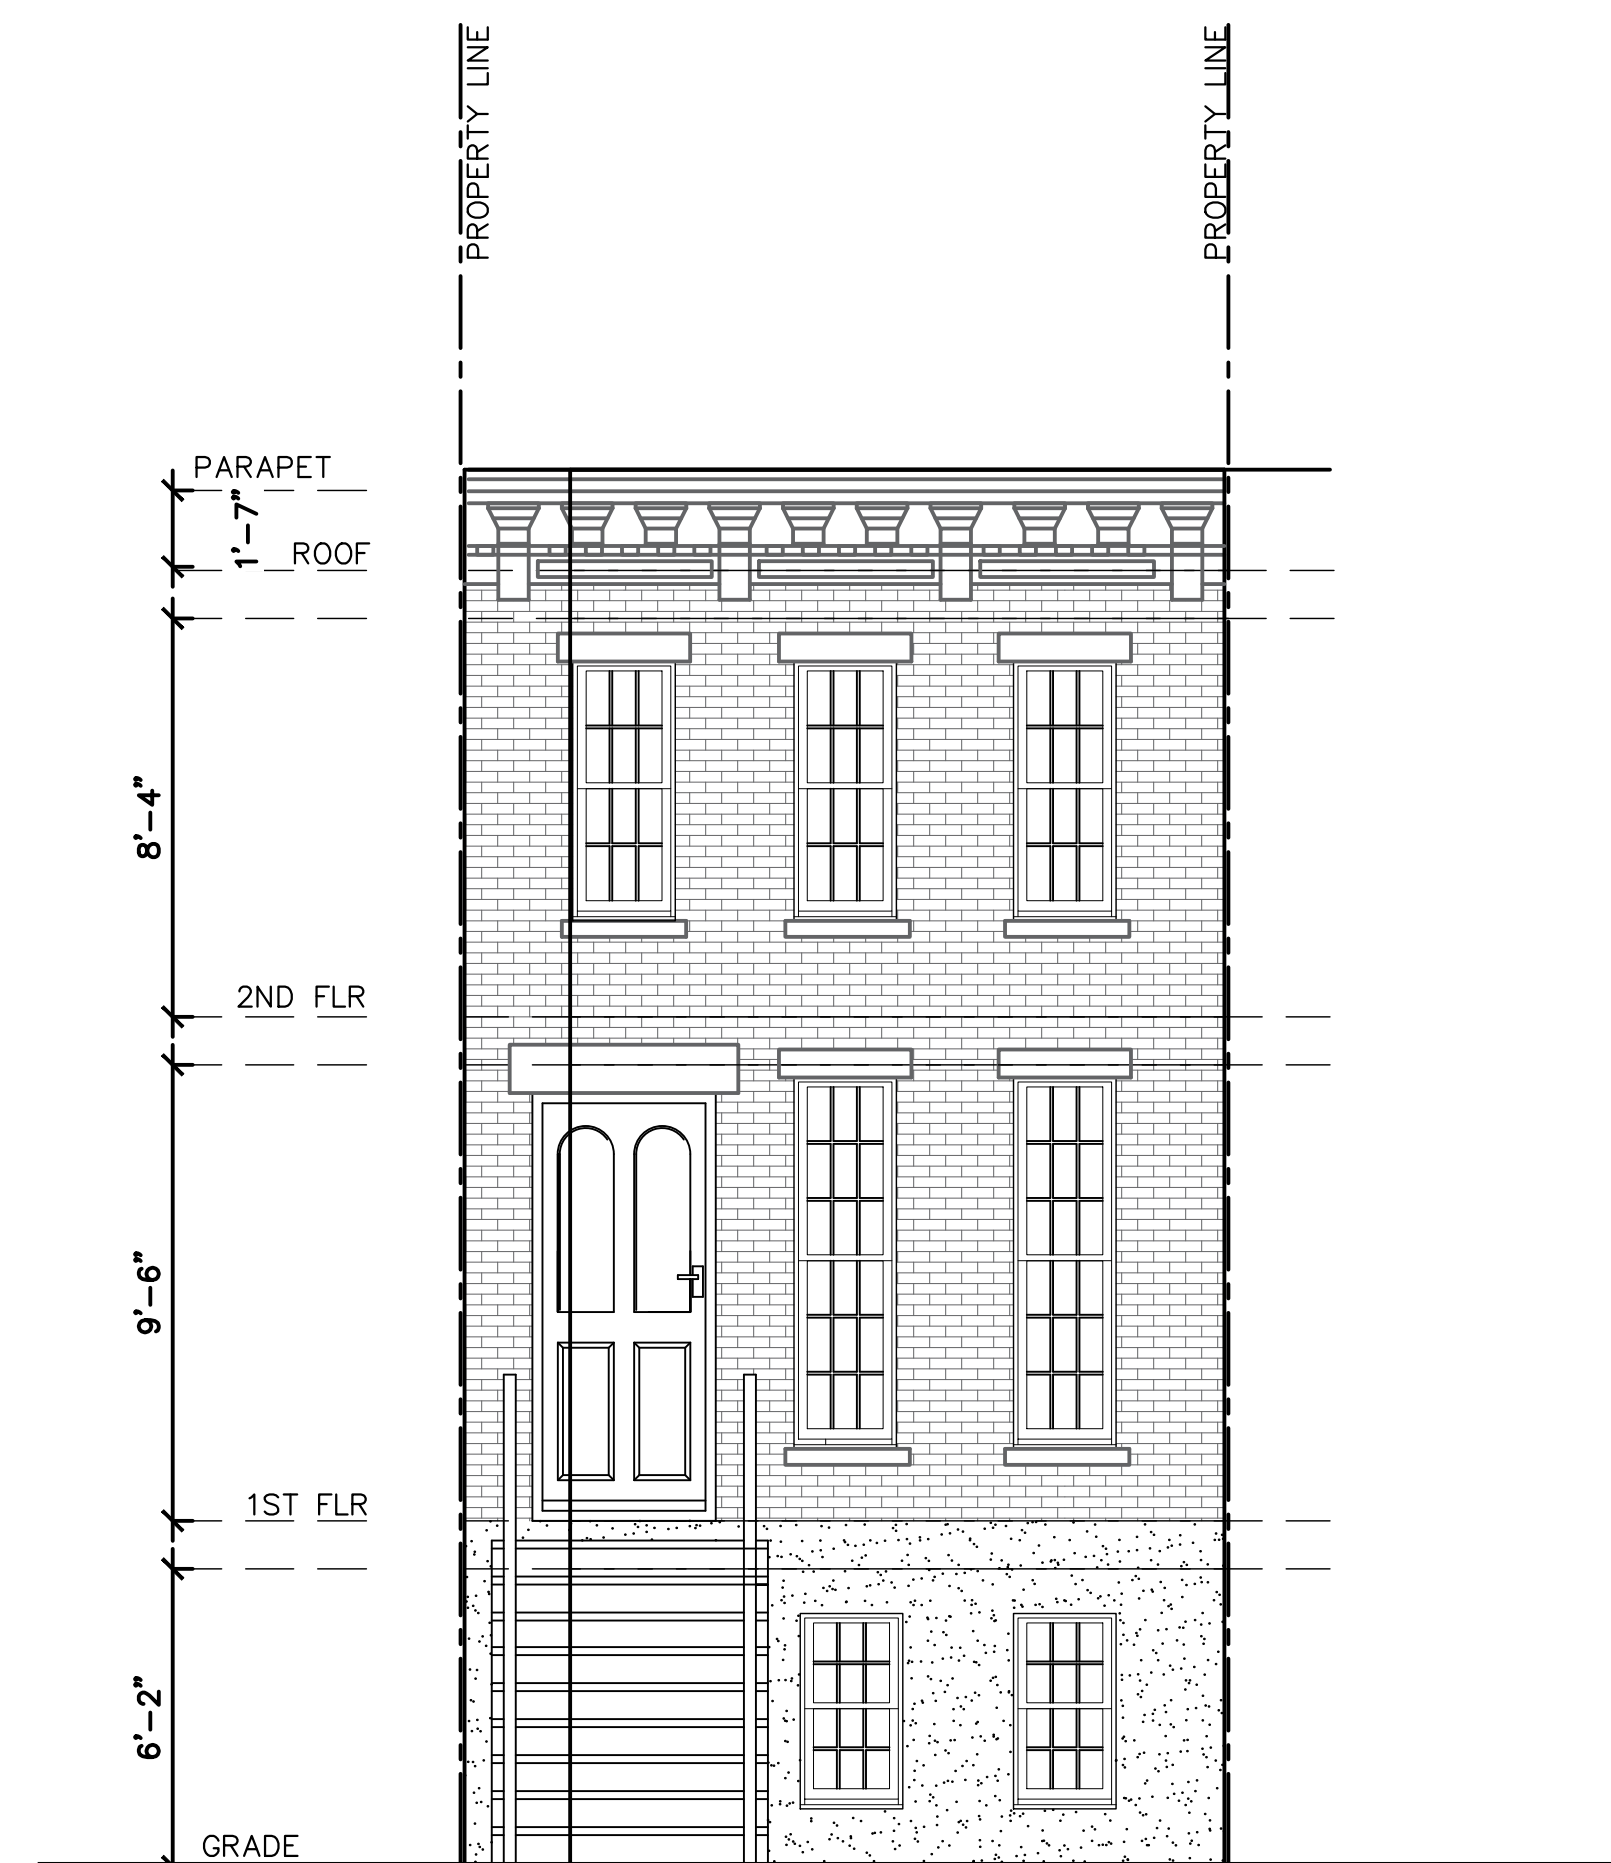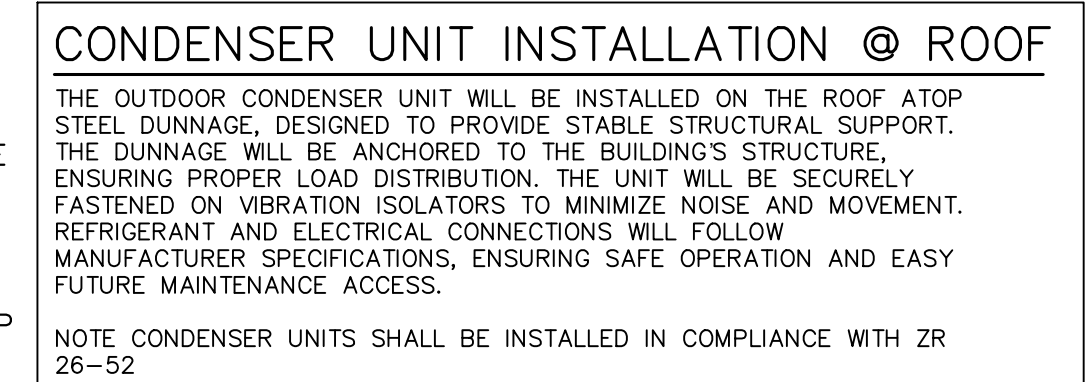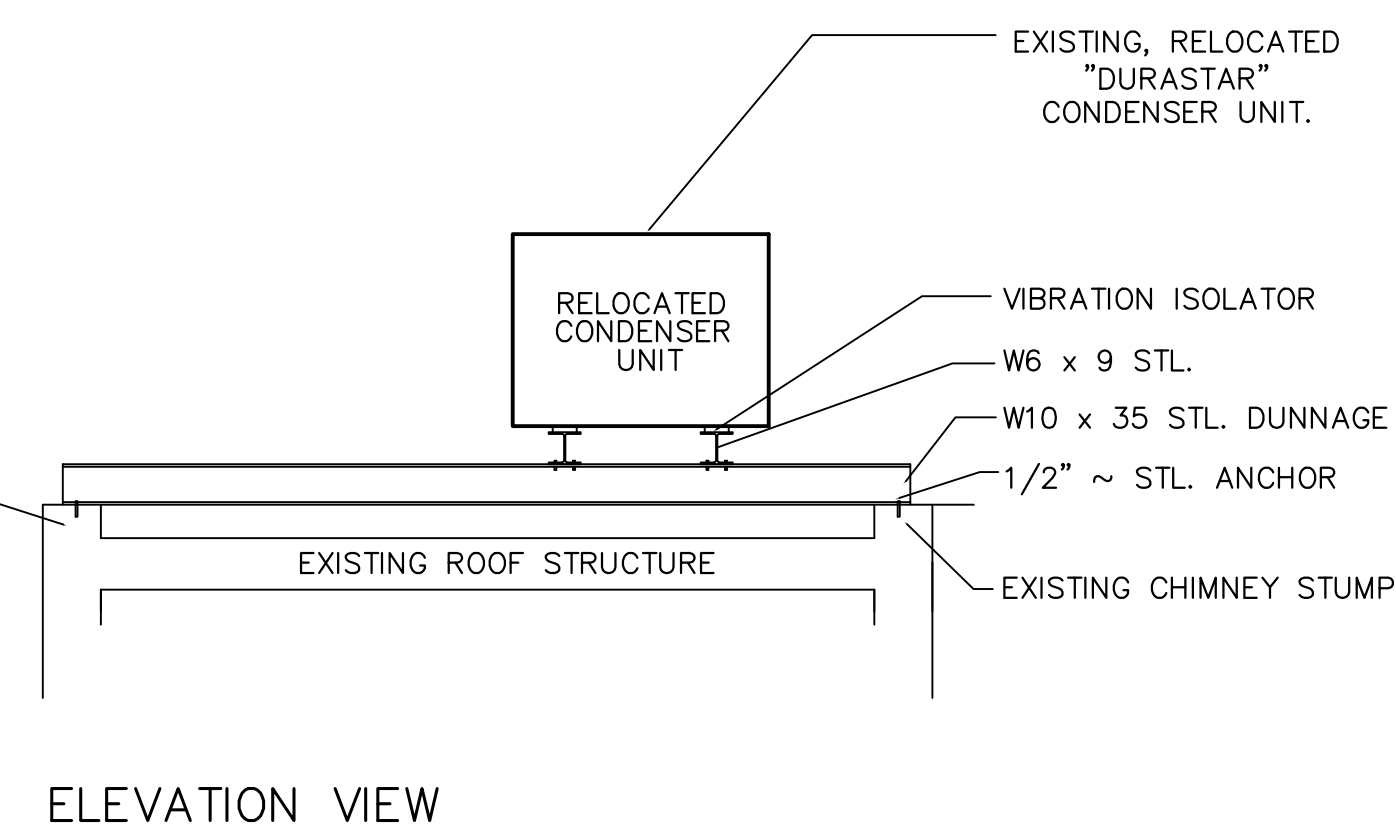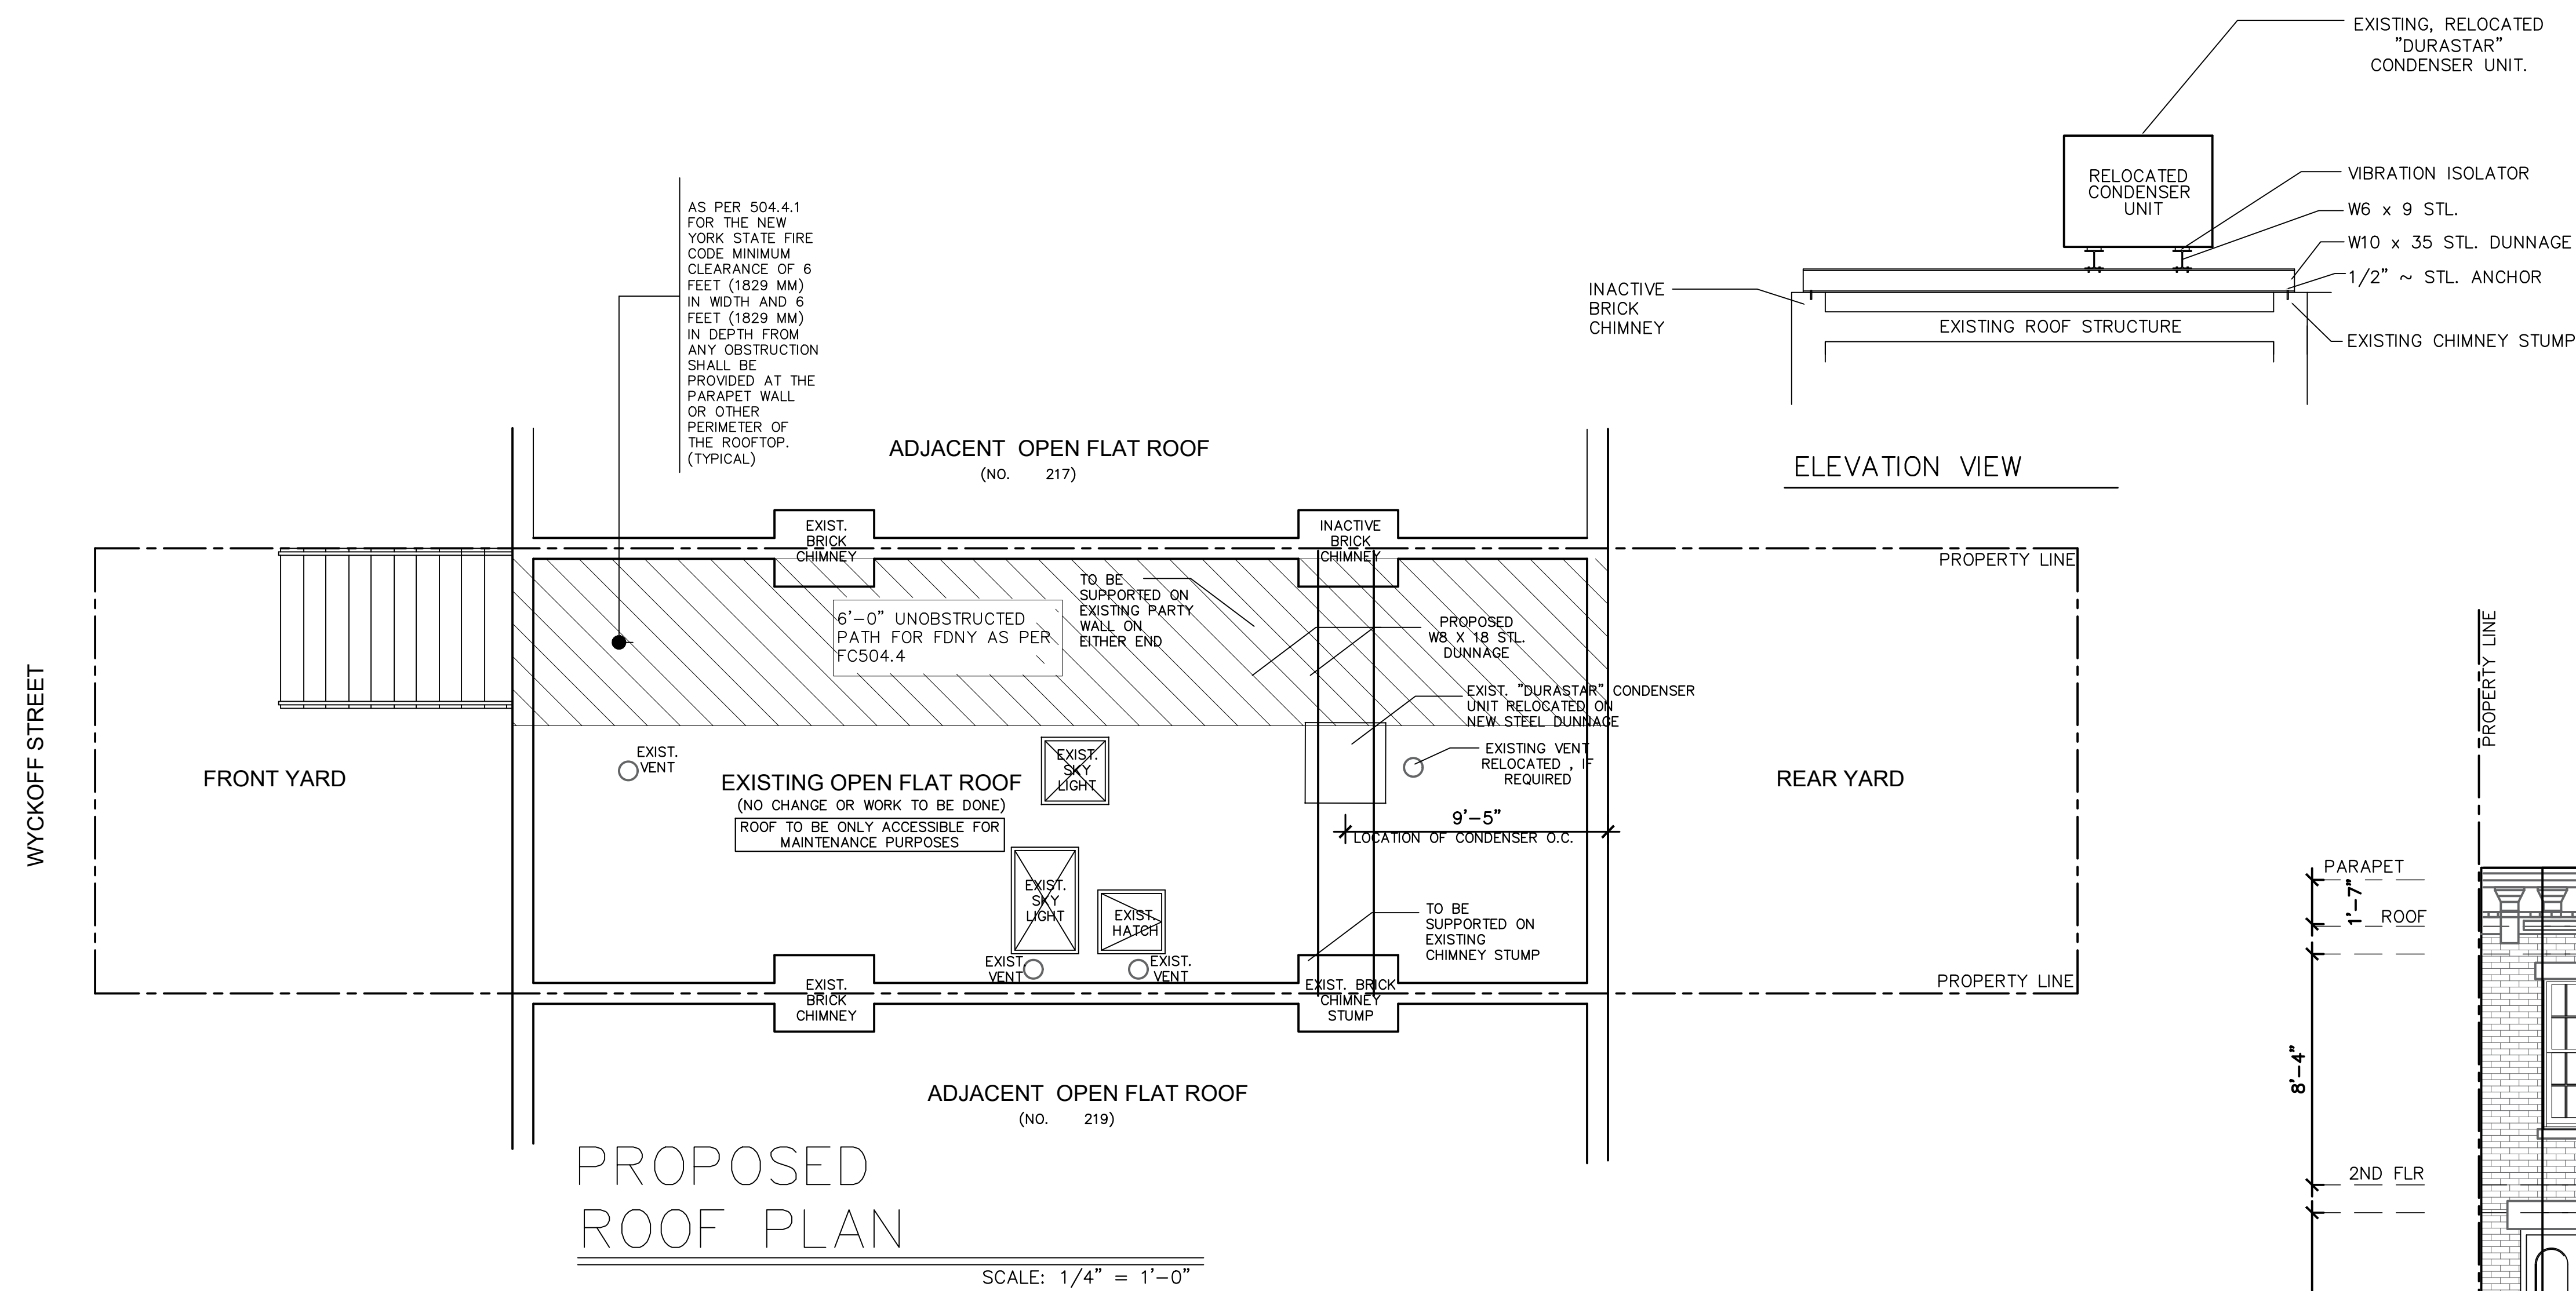

KC
EXPEDITING

2466 HARDING COURT
EAST MEADOW, NY 11554

[illegible]

OWNER:

PROJECT TITLE & ADDRESS:

INSTALLATION OF STEEL DUNNAGE & RELOCATION OF EXISTING CONDENSER :

**217A WYCKOFF ST
BROOKLYN, NY 11217
BLOCK: 387 LOT: 67**

SHEET TITLE:

PROPOSED ROOF, ELEVATIONS

A-005.00

SEAL & SIGNATURE

JOB#:

DRN BY: GU

CKD BY :

DATE: 03/12/26

SCALE: NTS

SHEET 5 OF 5